



Simply **Brilliant**



Designed to Inspire Confidence – Right Out of the Box!

Now anyone can produce beautiful, professional engraving of text and scanned graphics right from their computer. Roland designed the EGX-20 to be remarkably easy to operate, even for beginners. The EGX-20 is large and powerful enough to handle a wide variety of engraving jobs, including awards, product serial numbers, office directories, personalized items and more, yet small enough to fit comfortably on your desktop. Thanks to its intuitive joystick and dial controls, operation is uncomplicated for both novices and experienced professionals. The EGX-20 includes everything you need to get started immediately, including a complete suite of engraving software.





Roland's Active Surface Tracking System (AST)

How AST Works:


Among the most revolutionary of the EGX-20's features is its Automatic Surface Tracking System. AST automatically tracks the height of the material to ensure engraving at a consistent depth, even on bowed or non-uniform surfaces. Unlike systems that can take extensive trial and error to learn, AST makes setting the origin point and cutting depth effortless. Now you can produce consistently beautiful results with less learning time and less wasted materials.

An automatic height sensor is attached to the lower end of the spindle unit. In addition to tracking the



With its 15,000-rpm spindle motor, the EGX-20 is powerful enough to engrave on a wide variety of popular materials, including acrylics, PVC, ABS, polycarbonate and wood. With the optional diamond scraper and burnishing attachment, you can also scribe light metals such as aluminum and brass for awards. Securing the material to the worktable is easy with the included adhesive sheet. Once you select the material to be engraved from the menu of the included software, the EGX-20 automatically determines optimum cutting speed and tool path, assuring smooth accurate results.

Included with the EGX-20 is a complete suite of software: Dr. Engrave for nameplate engraving, 3D Engrave for

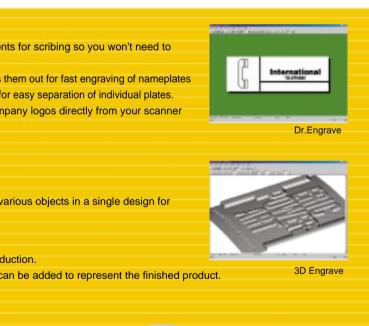



Desktop Engraver EGX-20 SPECIFICATIONS

Table size	220 (W) x 170 (D) mm (8-5/8 (W) x 6-11/16 (D) in.)
Table load weight	Maximum 1 kg (2.2 1b.)
Carriage cutting range	203.2 (X) x 152.4 (Y) x 31.8 (Z) mm (8 (X) x 6 (Y) x 1-1/4 (Z) in.)
Carriage operating speed	X and Y axes: 0.1 to 1 mm/s, 1 to 15 mm/s (0.0039 to 0.59 in./s)
	Z axis: 0.1 to 1 mm/s, 1 to 6 mm/s (0.0039 to 0.23 in./s)
Cutting-depth control	AST (Active Surface Tracking) system
Maximum cutting depth	3D Cutting mode: 0.05 to 7 mm (0.002 to 0.27 in.)
	Engraving mode: 0.05 to 1 mm (0.002 to 0.039 in.)
Cuttable materials	Composition: Resin (acrylic, modeling wax, ABS, polyacetal, polycarbonate, styrenefoam, etc.), wood, and plaster
	Maximum thickness: 30 mm (1-1/8 in.)
Resolution	0.01 mm/step (0.00039 in./step)
Spindle motor	12 W (DC motor)
Spindle rotating speed	4,000 to 15,000 rpm
Cutter diameter	3.175 mm (1/8 in.)
Interface*	Parallel (compliant with IEEE 1284)
Power supply	AC adapter
	Input: AC 100 to 240 V \pm 10%, 50/60 Hz Output: DC 19 V, 2.1 A
Power consumption	Maximum during operation: 0.6 A at 100 V, 0.27 A at 240 V
Operating noise level	Standby: Less than 45 dB (A)
	No-load operation: Less than 70 dB (A) (according to ISO 7779)
External dimensions	515.2 (W) x 368.3 (D) x 270.6 (H) mm (20-5/16 (W) x 14-1/2 (D) x 10-5/8 (H) in.)
Machine weight	10.9 kg (24 1b.)
Operating environment	Temperature: 5 to 40 °C (41 to 104 °F)
	Relative humidity: 35 to 80% (no condensation)
Included items and	AC adapter, power cord, cutter, cutter holder, depth regulator noses (large and small),
accessories	adhesive sheet for mounting material, test-use plate material, Roland Software Package CD-ROM, User's Manual

*USB Connectivity: You can connect the EGX-20 to your computer's USB port with the optional parallel to USB conversion cable (SX-UP2).

Available Options

Model No.		Description		Model No.	[
175 (1/8) cutters fo	r general engraving or	acrylic and resin material		Burnishing attachm	nent
ZEC-A2013	Cemented carbide	dia = 3.175, 114(L) x 0.127(W)		ZB-20	Diamond scraper (ZD
ZEC-A2025	Cemented carbide	dia = 3.175, 114(L) x 0.254(W)			
ZEC-A2051	Cemented carbide	dia = 3.175, 114(L) x 0.508(W)		Adhesive sheet for	securing engraving mate
ZEC-A2076	Cemented carbide	dia = 3.175, 114(L) x 0.762(W)		AS-10	210 mm x 140 mm (8
rallel cutters for en	graving large characters	(not intended for deep engraving) on acrylic a	nd resin material		
ZEC-A2150		dia = 3.175 , $114(L) \times 1.52(W)$		Replacement spind	
ZEC-A2190		dia = $3.175, 114(L) \times 1.91(W)$		ZM-12	Tests conducted by F
ZEC-A2190 ZEC-A2230		dia = $3.175, 114(L) \times 2.29(W)$			motor life of approxim
ZEC-A2320	Cemented carbide	dia = 3.175, 114(L) x 3.175(W)		Replacement spind	le
				Replacement spind ZS-20	le
	rs for engraving acryli	dia = 3.175, 114(L) x 3.175(W) c and resin material with high speed dia = 3.175, 114(L) x 0.13(W)		ZS-20	le
uarter round cutte	rs for engraving acryli	c and resin material with high speed	1	ZS-20	
Jarter round cutte ZEC-A2013-QR	rs for engraving acryli	c and resin material with high speed dia = 3.175, 114(L) x 0.13(W)	1	ZS-20	le 1.8m parallel to USB
Jarter round cutte ZEC-A2013-QR	rs for engraving acryli	c and resin material with high speed dia = 3.175, 114(L) x 0.13(W)	9	ZS-20	
Jarter round cutte ZEC-A2013-QR ZEC-A2025-QR	rs for engraving acryli Cemented carbide Cemented carbide	c and resin material with high speed dia = 3.175, 114(L) x 0.13(W)	9	ZS-20	

Model No.	Description		
Burnishing attachn	nent		
ZB-20	Diamond scraper (ZDC-A2000) is required.		
Adhesive sheet for	securing engraving material		
AS-10	210 mm x 140 mm (8-1/4 in. x 5-1/2 in.), 10 sheets		
ZM-12	le motor Tests conducted by Roland DG Corporation resulted in		
ZM-12	Tests conducted by Roland DG Corporation resulted in		
	motor life of approximately 1000 hours.		
Replacement spinc ZS-20	le		
	le		

Roland reserves the right to make changes in specifications, materials or accessories without notice. Your actual output may vary. For optimum output quality, periodic maintenance to critical components may be required. Please contact your Roland dealer for details. No guarantee or warranty is implied other than expressly stated. Roland shall not be liable for any incidental or consequential damages, whether foreseeable or not, caused by defects in such products. Windows, Windows NT are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners.



AUTHORIZED DEALER:

Printed in Japan. RDG90194 '02 JUN. A-4 C-S